SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. SCOTLAND - Building Standards (Scotland). Height ~6.3 m above the ground floor, below 11 m. Basement waterproofing (BS 8102), pool tank, slabs, vaulted roof, glazing and partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

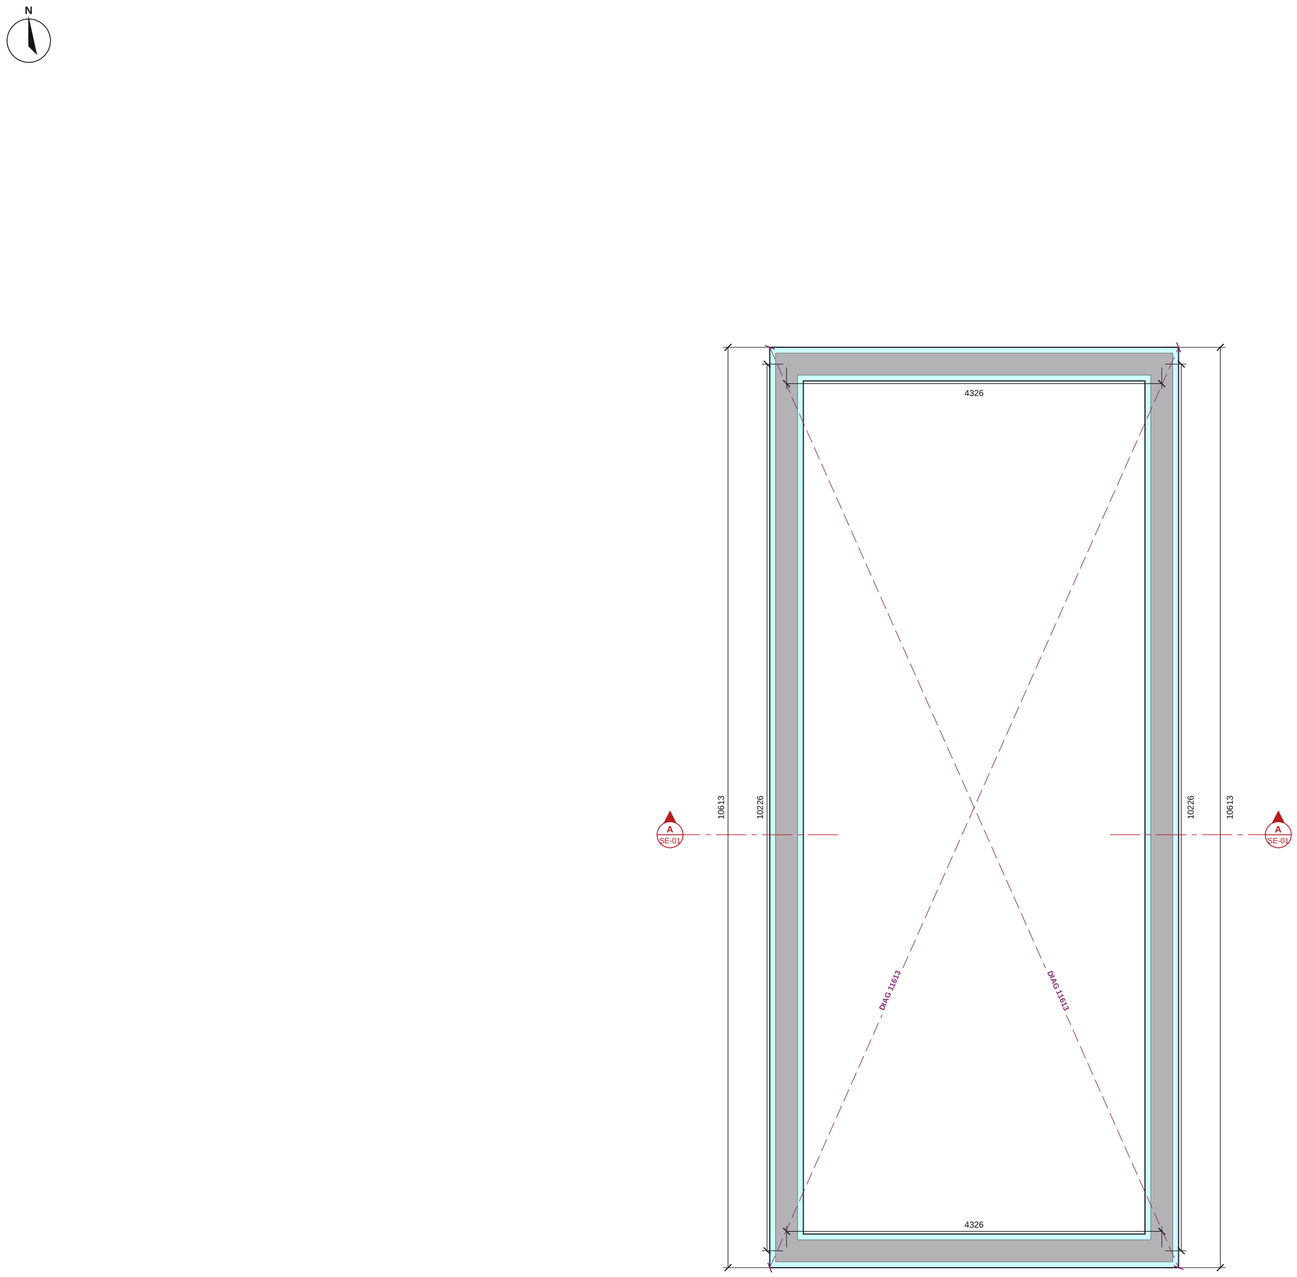

EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

POOL TANK ICF PLAN

Scale 1:50 @ A2 | Plan cut at -4343

0 1 2 3m

POOL TANK ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 10" Std, 66.7 EPS + 254.0 core + 66.7 EPS = 387.4. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet (planning drawings). ICF per the quotation model: 10in Standard pool tank + basement on the same core centre lines as the 6in XR35 ground floor; raft, pool base, GF suspended slab (pool hall + 7.5 m garage), garage door lintel, ridge beams / posts and the glazed gables for the engineer; BS 8102 waterproofing by a specialist.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	20.10.26	First issue - proposal Rev A

Nudura™ BuildEase

CLIENT	PROJECT
Mr K & Mrs Burrell	New Dwelling, Plot 1 Rivendell Park, Douglas

DRAWING TITLE
POOL TANK ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A2	20.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-084-GA-01	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.