
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. SCOTLAND - Building Standards (Scotland). Height ~6.3 m above the ground floor, below 11 m. Basement waterproofing (BS 8102), pool tank, slabs, vaulted roof, glazing and partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

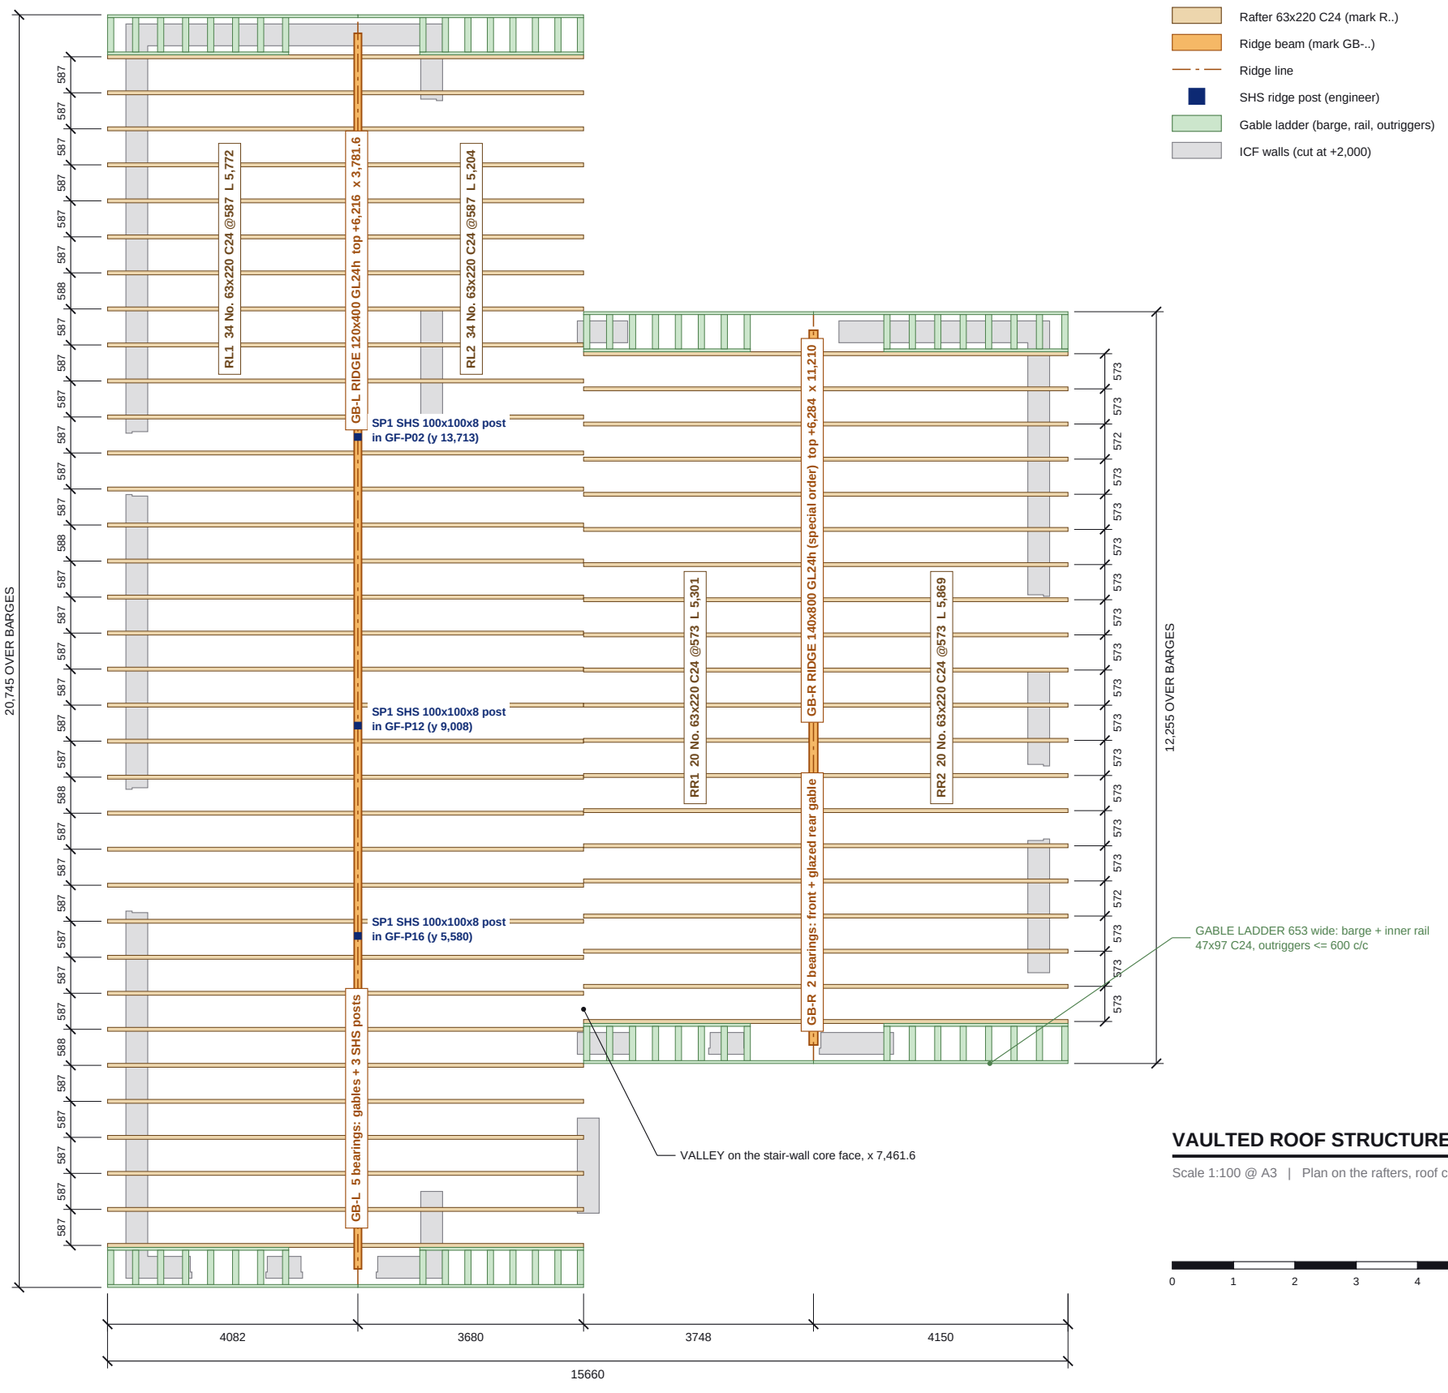

VAULTED ROOF STRUCTURE PLAN

Scale 1:100 @ A3 | Plan on the rafters, roof covering omitted

ROOF STRUCTURE SCHEDULES

ROOF MEMBER SCHEDULE

Mark	Member	Section	Length	Qty
GB-L	Ridge beam	120x400 GL24h	20,745	1
RL1	Rafter, west slope @587	63x220 C24	5,772	34
RL2	Rafter, east slope @587	63x220 C24	5,204	34
	Barge (ladder outer rail)	47x97 C24	5,772	2
	Barge (ladder outer rail)	47x97 C24	5,204	2
	Ladder inner rail	47x97 C24	4,082	2
	Ladder inner rail	47x97 C24	3,680	2
	Ladder outrigger	47x97 C24	558	32
GB-R	Ridge beam	140x800 GL24h (special order)	12,255	1
RR1	Rafter, west slope @573	63x220 C24	5,301	20
RR2	Rafter, east slope @573	63x220 C24	5,869	20
	Barge (ladder outer rail)	47x97 C24	5,869	2
	Barge (ladder outer rail)	47x97 C24	5,301	2
	Ladder inner rail	47x97 C24	4,150	2
	Ladder inner rail	47x97 C24	3,748	2
	Ladder outrigger	47x97 C24	558	32
SP1	Ridge post (Roof L)	SHS 100x100x8	5,891	3

Lengths = cut lengths from the model (rafters plumb-cut at the ridge, birdsmouth at the plate). Rafters: 68 No. Roof L + 40 No. Roof R. Post length from slab level -75 to top +5,816 (cut to the ridge soffit; engineer).

ROOF METALWORK

Item	Qty
Gable restraint strap 30 x 5 (HES)	24
Rafter clip to wall plate (TCP50)	108

Ridge beam hangers / post caps and bases: by the engineer.

NOTES

1. Vaulted (cut) roofs with a structural ridge, as modelled for the quotation (TLS roof framer, system cut_ridge): 45 deg, 63x220 C24 rafters at the centres shown (600 max, set out from the gable), each seated on the eaves wall plate on the ICF core (birdsmouth, TCP50 clip) and bearing on the ridge beam at the top. Vaulted ceiling under: GF partitions are raked to the rafter soffit (ES26-084-TF-02).
2. Roof L ridge: 120x400 GL24h, 20,745 long, x 3,781.6, top +6,216, on 5 bearings - both gables and 3 No. 100x100x8 SHS posts built into partitions GF-P16 (y 5,580), GF-P12 (y 9,008) and GF-P02 (y 13,713), posts down through the GF slab.
3. Roof R ridge: 140x800 GL24h (special order), 12,255 long, x 11,210, top +6,284, on 2 bearings: the front gable and the glazed dining gable at the rear (bearing post / frame by the engineer).
4. Gable ladders 653 wide (barge + inner rail 47x97 C24, outriggers <= 600 c/c, 177 verge past the wall face); HES 30x5 restraint straps at the gables. Valley between the roofs on the stair-wall core face (x 7,461.6).
5. INDICATIVE ONLY: ridge beams, posts, bearings and connections to be designed by the structural engineer (snow zone 4 / vb 25.5 m/s assumed, ~220 m AOD). Levels above GF FFL. Dimensions in mm.

REVISIONS

REV	DATE	DESCRIPTION
Q01	20.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Mr K & Mrs Burrell	New Dwelling, Plot 1 Rivendell Park, Douglas

DRAWING TITLE

VAULTED ROOF STRUCTURE

Rafters, ridge beams, steel ridge posts, gable ladders

SCALE	SIZE	DATE
1:100	A3	20.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-084-RF-01	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.