
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. SCOTLAND - Building Standards (Scotland). Height ~6.3 m above the ground floor, below 11 m. Basement waterproofing (BS 8102), pool tank, slabs, vaulted roof, glazing and partitions are shown in good faith for coordination only - engineer / specialists to design.

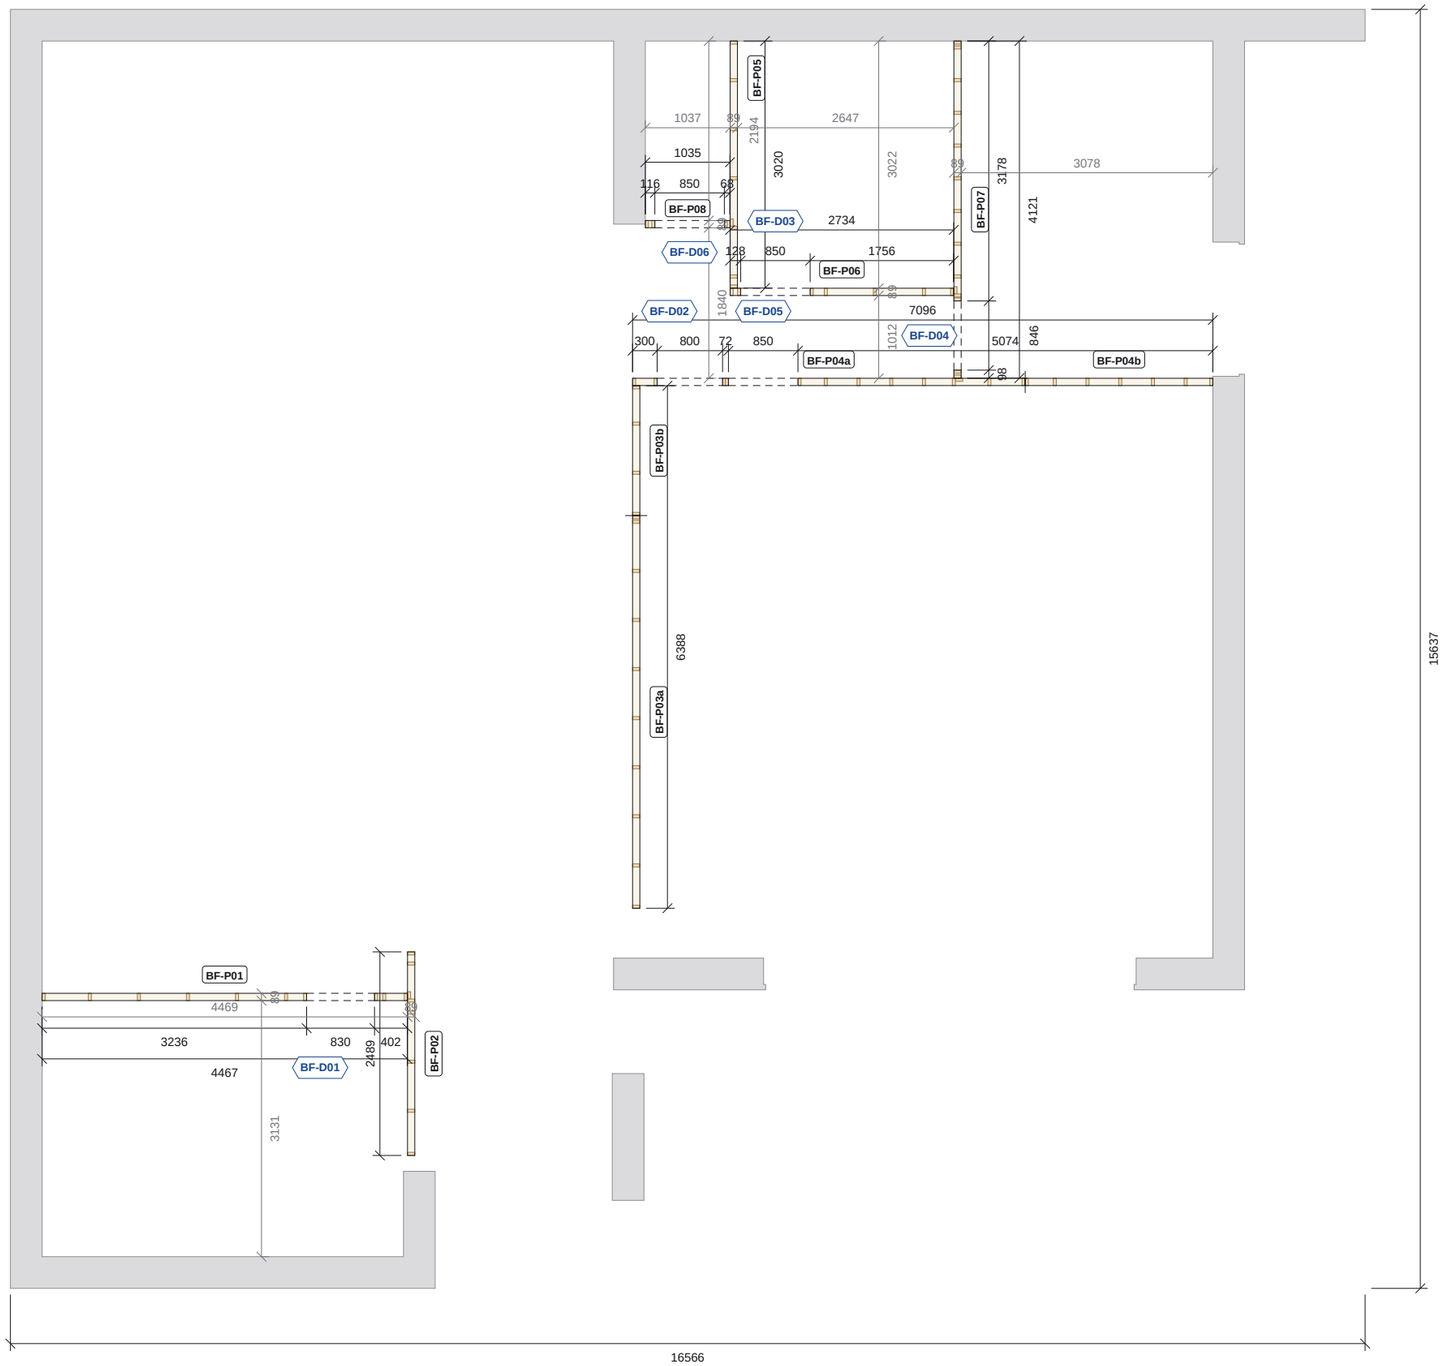

BASEMENT TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above basement FFL

0 1 2 3 4 5m

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

BASEMENT SCHEDULES

PARTITION SCHEDULE

Panel	Head	C16 studs	Use	Length	Doors
BF-P01	soffit	38x89 @600	partition	4467	BF-D01
BF-P02	soffit	38x89 @600	partition	2489	-
BF-P03a	soffit	38x89 @600	partition	4800	-
BF-P03b	soffit	38x89 @600	partition	1586	-
BF-P04a	soffit	38x89 @400	wet room	4800	BF-D02, BF-D05
BF-P04b	soffit	38x89 @400	wet room	2294	-
BF-P05	soffit	38x89 @600	partition	3020	-
BF-P06	soffit	38x89 @600	partition	2734	BF-D03
BF-P07	soffit	38x89 @400	wet room	4121	BF-D04
BF-P08	soffit	38x89 @600	partition	1035	BF-D06

Length along the wall (mm). Head = to the GF RC slab soffit (-325), slotted head clips.

DOOR OPENING SCHEDULE

Label	Width	Height	Head
BF-D01	830	2100	2100
BF-D02	800	2100	2100
BF-D03	850	2100	2100

Label	Width	Height	Head
BF-D04	846	2100	2100
BF-D05	850	2100	2100
BF-D06	850	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (BASEMENT)

Section	Pieces	Run m	4.8m lengths
38x89 C16	205	350.6	77
18 WBP ply pattress	34	-	-
Slotted head clip	122	-	-

From the model. 4.8m lengths = run / 4.8 +5%, not cut-optimised.

NOTES

1. Non-load-bearing internal partitions (TLSTF): 38x89 C16 studs @600, 38x89 head and bottom rails, 15 board each side (119); wet-room walls (laundry) at 400 centres with 18 WBP ply pattress in the stud bays, 150-1950 above floor (34 pieces).
2. Basement walls are Nudura ICF (grey), shown for context only: read with the ICF drawings and the BS 8102 waterproofing design (specialist). Partitions set out from the ICF internal face (grey strings).
3. Basement FFL -3,300 (screed). Sole plates fixed to the screed / slab (DPC under) at <= 600 c/c. Heads run to the GF RC slab soffit (-325) and are restrained with slotted deflection head clips fixed to the soffit (122 No., 5 mm deflection gap) - product by others to confirm.
4. Door openings are structural opening sizes; head level above the underside of the bottom rail. Dimensions to timber frame faces. Check all dimensions on site.

REVISIONS

REV	DATE	DESCRIPTION
Q01	20.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Mr K & Mrs Burrell	New Dwelling, Plot 1 Rivendell Park, Douglas

DRAWING TITLE

BASEMENT TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
1:75	A3	20.10.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-084-TF-01	Q01