
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. SCOTLAND - Building Standards (Scotland). Height ~6.3 m above the ground floor, below 11 m. Basement waterproofing (BS 8102), pool tank, slabs, vaulted roof, glazing and partitions are shown in good faith for coordination only - engineer / specialists to design.

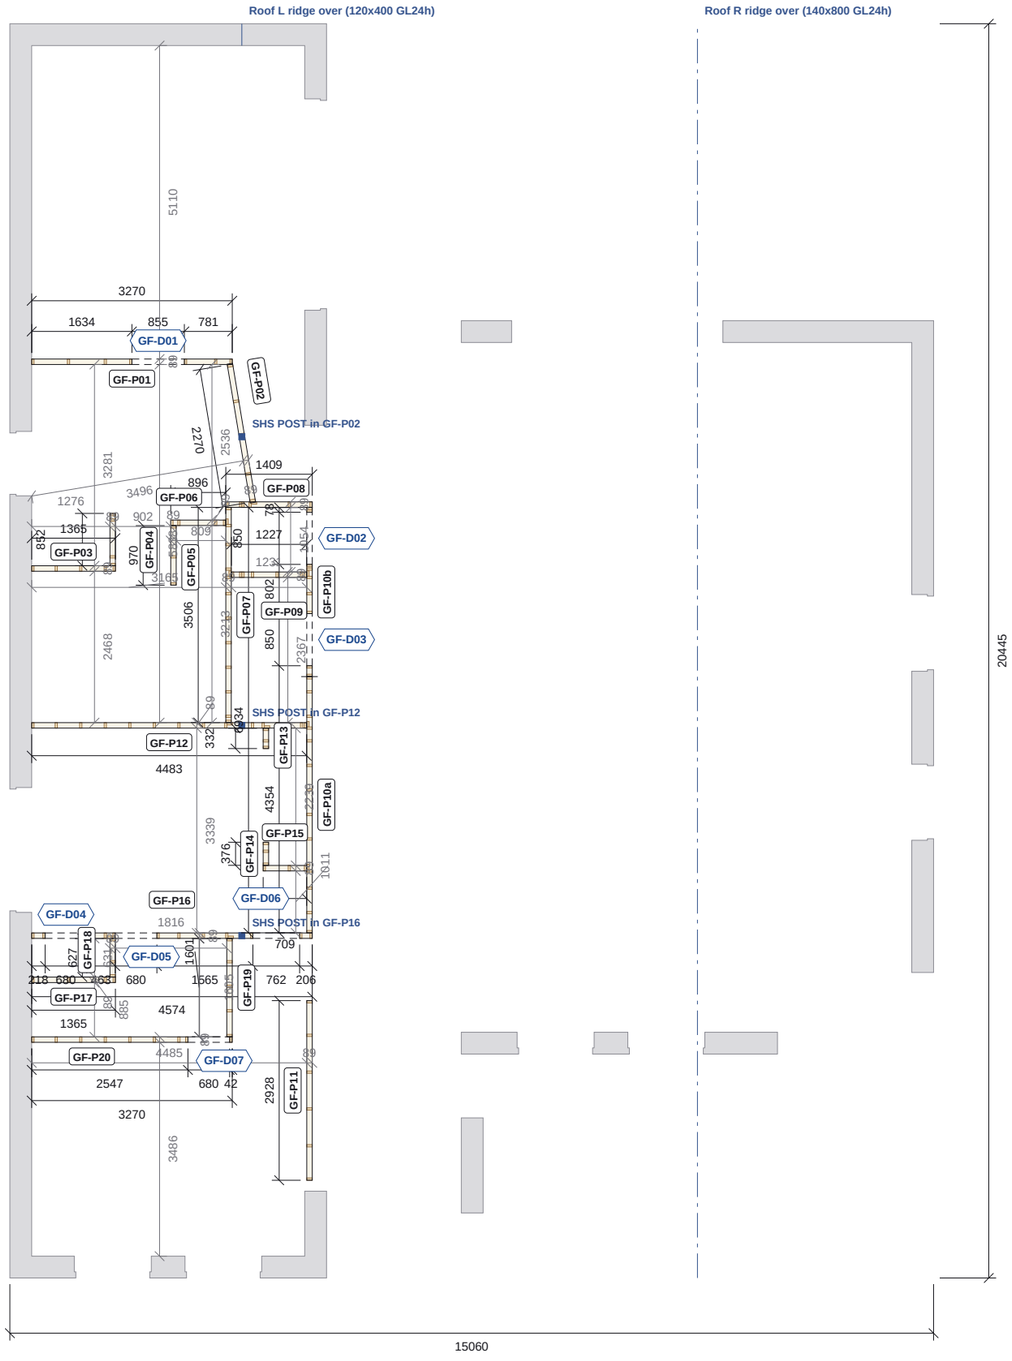

GROUND FLOOR TIMBER PARTITIONS PLAN

Scale 1:100 @ A3 | Plan cut at 1200 above GF FFL

0 1 2 3 4 5m

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over | SHS post / ridge over

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

GROUND FLOOR SCHEDULES

PARTITION SCHEDULE

Panel	Head	C16 studs	Use	Length	Doors
GF-P01	2,439-5,709	38x89 @600	partition	3270	GF-D01
GF-P02	5,672-5,865	38x89 @600	partition	2270	-
GF-P03	2,439-3,804	38x89 @400	wet room	1365	-
GF-P04	3,759	38x89 @600	partition	852	-
GF-P05	4,750	38x89 @600	partition	970	-
GF-P06	4,706-5,604	38x89 @600	partition	896	-
GF-P07	5,648	38x89 @400	wet room	3506	-
GF-P08	4,717-5,865	38x89 @600	partition	1409	-
GF-P09	4,806-5,865	38x89 @400	wet room	1227	-
GF-P10a	4,762	38x89 @400	wet room	4176	-
GF-P10b	4,762	38x89 @400	wet room	2756	GF-D02, GF-D03
GF-P11	4,762	38x89 @600	partition	2928	-
GF-P12	2,439-5,865	38x89 @400	wet room	4483	-
GF-P13	5,472	38x89 @600	partition	332	-
GF-P14	5,472	38x89 @600	partition	376	-
GF-P15	4,806-5,517	38x89 @600	partition	709	-
GF-P16	2,439-5,865	38x89 @400	wet room	4574	GF-D04, GF-D05, GF-D06
GF-P17	2,439-3,804	38x89 @600	partition	1365	-
GF-P18	3,759	38x89 @400	wet room	627	-
GF-P19	5,664	38x89 @400	wet room	1601	-
GF-P20	2,439-5,709	38x89 @400	wet room	3270	GF-D07

Length along the wall (mm). Head = top of frame above GF FFL, raked to the vault (min-max).

DOOR OPENING SCHEDULE

Label	Width	Height	Head
GF-D01	855	2100	2100
GF-D02	850	2100	2100
GF-D03	850	2100	2100
GF-D04	680	2100	2100

Label	Width	Height	Head
GF-D05	680	2100	2100
GF-D06	762	2100	2100
GF-D07	680	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (GROUND FLOOR)

Section	Pieces	Run m	4.8m lengths
38x89 C16	353	897.4	197
18 WBP ply pattress	86	-	-

From the model. 4.8m lengths = run / 4.8 +5%, not cut-optimised.

NOTES

1. Non-load-bearing internal partitions (TLSTF): 38x89 C16 studs @600, 38x89 head and bottom rails, 15 board each side (119); wet-room walls (ensuite (master), cloaks, ensuite (bed 3)) at 400 centres with 18 WBP ply pattress in the stud bays, 150-1950 above floor (86 pieces).
2. External walls Nudura ICF (grey), context only - read with the ICF drawings. Set-out strings in grey.
3. VAULTED CEILING: every GF partition head is RAKED to the vault - rafter soffit less the 40 lining (Roof L: z = 5,905 - |x - 3,781.6| - 40). Head rails follow the rafter pitch (45 deg) and are fixed to the rafters, or to noggins between rafters where the partition runs parallel.
4. Three 100x100x8 SHS steel ridge posts (Roof L ridge, x 3,781.6) are built into partitions GF-P16 (y 5,580), GF-P12 (y 9,008) and the angled dresser wall GF-P02 (y 13,713): studs packed round the post - engineer to design the posts, bases and connections.
5. Sole plates fixed to the GF slab at <= 600 c/c, DPC under. Dimensions to frame faces; check on site.

REVISIONS

REV	DATE	DESCRIPTION
Q01	20.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Mr K & Mrs Burrell	New Dwelling, Plot 1 Rivendell Park, Douglas

DRAWING TITLE

GROUND FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
1:100	A3	20.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-084-TF-02	Q01